

RS- 15

OPENING & PRESENCE SENSOR FOR INTERNAL RAILWAY DOORS

Commercial sheet



GREAT DETECTION AREA FLEXIBILITY: 1 SENSOR WITH A CHOICE OF 9 AVAILABLE DETECTION FIELD SHAPES

DESCRIPTION

Sensor with combined functions for internal doors, the **RS-15** is designed to open doors when needed and keep them open in case of presence in the threshold for the passenger comfort and safety.


Very flexible detection area thanks to a matrix of 3×5 configurable spots.

PERFORMANCE

- Active IR technology, background analysis sensor producing 3 lines of 5 spots. Typical dimension: detection area $1.2 \text{ m} \times 1 \text{ m}$ @ mounting height of 2.2 m.
- Based on the 15 available spots, 9 different shapes of detection areas are available as presets.
- As each of the 15 spots can be individually switched on in either motion or presence detection or switched off, any combination out of more than 14 million choices can be supplied on request.
- Compliant with railway norms.
- NO/NC output relay available.
- Conceived for every train design with a focus on aesthetics.



RS-15 ■

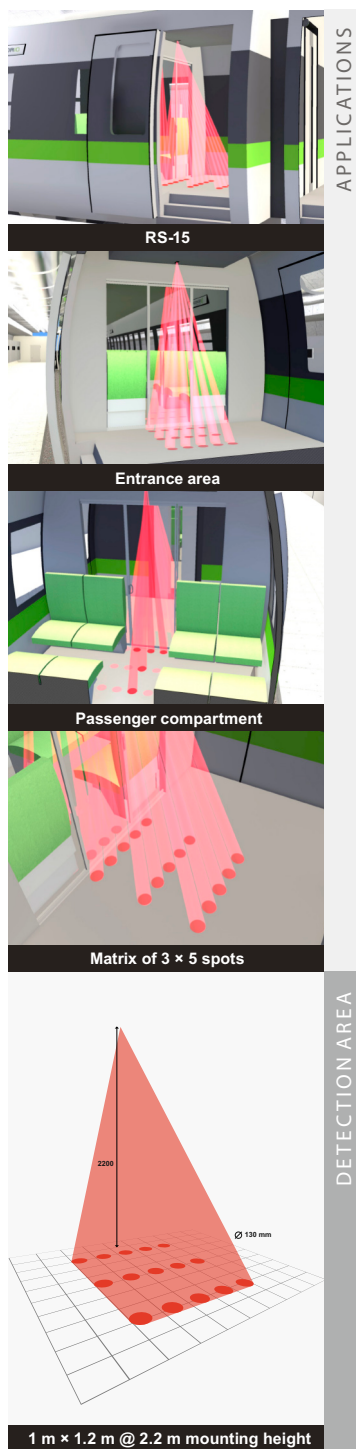

APPLICATIONS

- Internal Railway doors: motion detection and/or presence detection in the door threshold.
- 9 presets available to cover different types of platforms, entrance areas, aisles, etc.
- Convenient solution for retrofit projects.

EASE OF INSTALLATION

- Compact housing.
- Tilt angle accessible even when sensor is recessed.
- Configurable parameters adjustable with a remote control.

TECHNICAL SPECIFICATIONS

Technology	Focused active infrared with background analysis
Optical features	15 independent IR spots producing a rectangular-shaped detection field
Max. mounting height	2.5 m
Tilt angles	0° to 20° (step = 5°)
Detection area	
Mounting height: 2.2 m ; angle: 20°	1 m (W) x 1.2 m (D)
Spot dimension (typical)	130 mm (diameter)
Detection mode	Motion and presence
Reaction time	< 100 ms
Supply voltage (nominal)	24 V DC acc. to EN 50155 (2 V to 45 V DC $\pm 10\%$)
Power consumption	< 3 W
Output relay	Free of potential change-over contact
Max. contact voltage	42 V AC - 60 V DC
Max. contact current	1 A (resistive)
Max. switching power	30 W (DC) / 60 VA (AC)
Connections	Integrated 7-pin connector, unpluggable
Mounting	Designed to be flush-mounted
Norms and conformity	EMC 2004/108/EEC; EN 50155; NF F16-102 (optional); TS EN 45545
Temperature range	-25°C to +55°C
Degree of protection	IP41
Dimensions	140 mm (L) x 38 mm (W) x 55 mm (D)
Weight	0.1 kg
Material	ABS (PC for NF F16-102)
Color of housing	Tinted black
Length of cable	1 m (total); material compliant with DIN5510
Adjustments	
Sensitivity	By push buttons or remote control (4 levels)
Shape of detection area	By push buttons or remote control (choice of 9 pre-programmed fields)
Tilt angle	Mechanically
Hold time	By remote control (from 0,5 s to 9 s in 10 steps)
Max. presence time	By remote control (20 s to 25 min in 10 steps)
Security	By remote control (4-digit entry code)

Specifications are subject to change without prior notice.

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time / Prices, shipping and availability are subject to change without prior notice.



RS-15 OPENING & PRESENCE SENSOR FOR INTERNAL RAILWAY DOORS



Liege Science Park - Allée des Noisetiers 5, Angleur - BELGIUM - TEL +32.4.361.6565 - FAX +32.4.3612858

