

# IXIO-M

## OPENING SENSOR FOR ALL TYPES OF AUTOMATIC DOORS

Commercial sheet



### THE ACTIVATION SOLUTION OF THE IXIO RANGE


#### DESCRIPTION

The **IXIO-M** uses radar technology to detect movement and activate all types of doors in whatever environment they may be. Thanks to its unidirectional sensing method, **IXIO-M1** offers a stability and reliability second to none. The unidirectional radar enables energy savings to be made.


#### FEATURES

- Due to the unidirectionality, the duration of the door opening cycle is shorter, which reduces heat loss in the building and saves energy. This also optimises the "airlock" function.
- Easy configuration with two DIP switches and potentiometer.
- Compact design in harmony with the IXIO range.





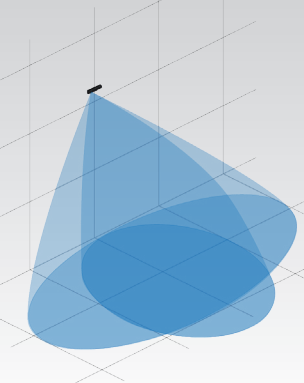

**Single-leaf swing doors**



**Detection area wide 4 m x 2 m @ 2.2 m  
or narrow 2 m x 2.5 m @ 2.2 m**



**IXIO-D**  
Sensor with combined radar and infrared for opening and safety of sliding doors.



**IXIO-S**  
Presence sensor with infrared technology for the safety of sliding doors.

APPLICATIONS

DETECTION RANGE

IXIO RANGE

## APPLICATIONS

- Activation of linear, telescopic, curved, swinging, turning and folding automatic sliding doors.

## EASE OF INSTALLATION

- Configuration of basic functions with push buttons.
- Lateral orientation from -15° to +15° for the radar antenna.
- Plug, push & go.

## VERSIONS

- IXIO-M1 : unidirectional opening sensor
- IXIO-M2 : bidirectional opening sensor

## ACCESSORY



Mounting accessory

Mounting in ceiling

## TECHNICAL SPECIFICATIONS

<b>Detection mode</b>	Motion
<b>Technology</b>	Microwave doppler radar
<b>Transmitter frequency</b>	24.150 GHz
<b>Transmitter radiated power</b>	< 20 dBm EIRP
<b>Transmitter power density</b>	< 5 mW/cm <sup>2</sup>
<b>Min. detection speed</b>	5 cm/s (measured in sensor axis)
<b>Supply voltage</b>	12 V to 24 V AC ±10%; 12 V to 24 V DC +30% / -10%
<b>Mains frequency</b>	50 to 60 Hz
<b>Max power consumption</b>	< 2 W
<b>Output</b>	Relay (free of potential change-over contact)
Max. contact voltage	42 V AC/DC
Max. contact current	1 A (resistive)
Max. switching power	30 W (DC)/60 VA (AC)
<b>Mounting height</b>	from 1.8 m to 3 m
<b>Temperature range</b>	-20°C to +55°C
<b>Degree of protection</b>	IP54
<b>Dimensions</b>	180 mm (L) x 58 mm (H) x 50 mm (W)
<b>Tilt angles</b>	15° to 45° vertical; -15° to +15° en lateral
<b>Material</b>	ABS
<b>Weight</b>	120 g
<b>Cable lenght</b>	2.5 m
<b>Applicable directives</b>	R&TTE 1999/5/CE; EMC 2004/108/CE

*Specifications are subject to change without prior notice.*

**DISCLAIMER** This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.

